

Model Super-Rapid

Plug-in-Foot platform
manufactured from Aluminium
German DIN 4112 and DIN 1055



Variable stage-instalments in every size can be realised with Super-Rapid WITHOUT diagonal braces up to 180 cm. Platforms can be mounted fast and with less man-power. Stable fixation one among another with Klemmfix-connectors and special Combi-Clip fast-connectors.



Product-Description

Plug-in-Foot platform existing of an aluminium-edge, 11 cm high, with a 22 mm deck, brown stained and screwed in tightly. The aluminium-edge exists of 2 nuts >



Super-Rapid

for double connection > important for the stable connection in high heights. There also can be fixed accessories like stairs, handrails, ... The platform is on the bottom-side equipped with 4 corner castings, in which stick- /telescopic feet 60 x 60 mm are mounted. The mounting of the feet can be done without an additional tool.



Assembly

After fixation of the feet (screwed into the corner castings on the bottom-side) the platforms are arranged in the wished formation and fixed one beneath/behind the other with standard connecting-parts and for high instalments with special clamps: Combi-Clip to guarantee a stable, even assembly also for the high heights.



Accessories

Stairs, handrails, transport-systems ... are available in standard- and special measures. Further details: "System-Accessories".





Demountable Staging Systems



Super-Rapid manufactured full-alu with double-nut for connection and fixing accessories.

Construction of the alu-frame and feet is analogue to German DIN-premises.

Testes type-calculation up to 180 cm is available.

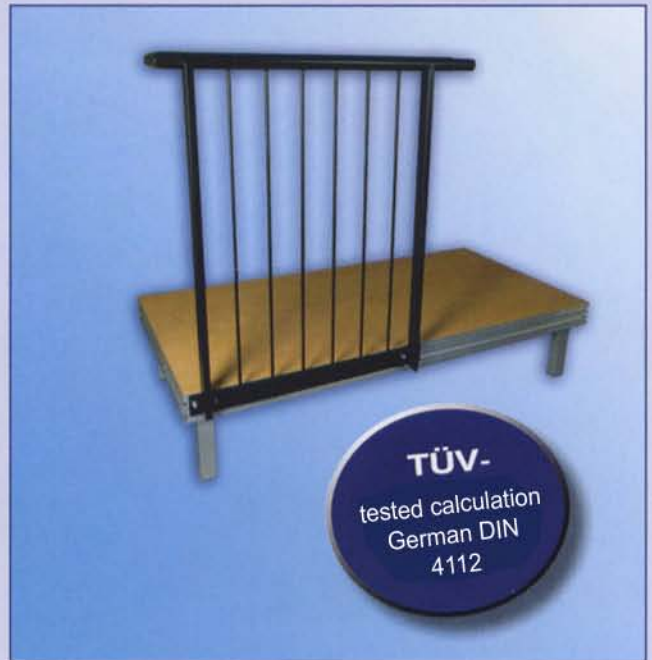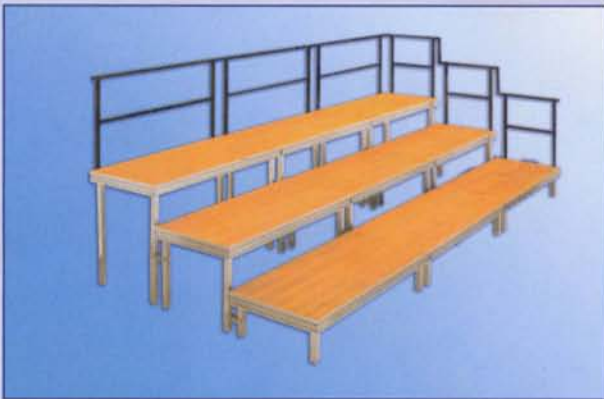

TÜV-
tested calculation
German DIN
4112



Technical Details

Size	: 200 cm x 100 cm (special measures possible)
Weight	: circa 45 kg
Loading-Capacity	: 750 daN/m ²
Frame-Height	: 11 cm
Storage-Height	: 11 cm
Heights	: 11 - 180 cm (without diagonal braces) for stick-/telescopic feet 60 mm x 60 mm